



10 JUN 2005

(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/056238 A1

(51) International Patent Classification⁷: A47C 3/02

(21) International Application Number: PCT/NO2003/000438

(22) International Filing Date: 22 December 2003 (22.12.2003)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) Priority Data:
20026157 20 December 2002 (20.12.2002) NO

(71) Applicant (for all designated States except US): STOKKE GRUPPEN AS [NO/NO]; Håhjem, N-6260 Skodje (NO).

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** RØNNESTAD, Tor
[NO/NO]; Turheisveien 6, N-6011 Alesund (NO).

(74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M,
N-0306 Oslo (NO).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,

CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, ME, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,

[Continued on next page]

(54) Title: A MOBILE JOINT SUITABLE FOR A SITTING DEVICE

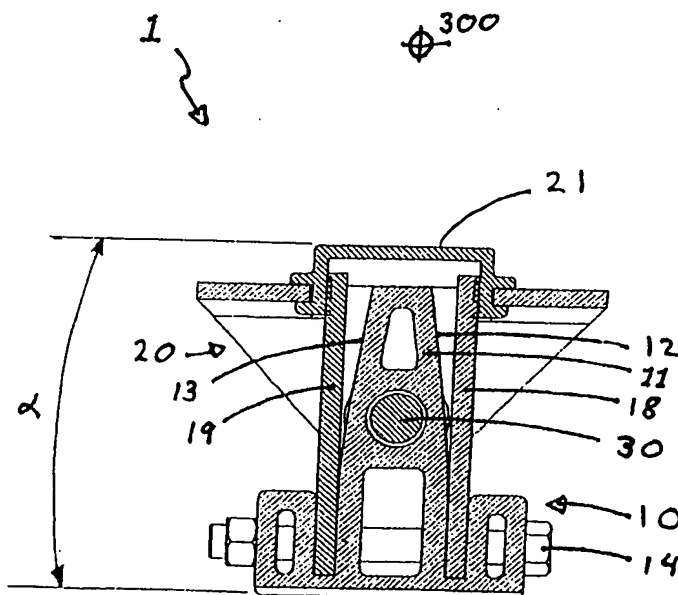

(57) Abstract: The present invention relates to a mobile joint (1) with spring resistance, suitable for a sitting device, comprising a first and a second joint element (10, 20), which are pivotally connected by a shaft (3), to allow tilting of the sitting device caused by the displacement of the users weight, comprising a first and a second parallel plate spring (18, 19) with first and second ends, with an intermediate blocking element (11), wherein each plate spring (18, 19) in the first end are connected to the first joint element (10), and in the second end are glidingly abutting the second joint element (20), the first and second plate spring (18, 19) each having an axis of rotation that is displaced in relation to each other and the shaft (3).

WO 2004/056238 A1